


LIGHTING BUSBAR TRUNKING SYSTEMS

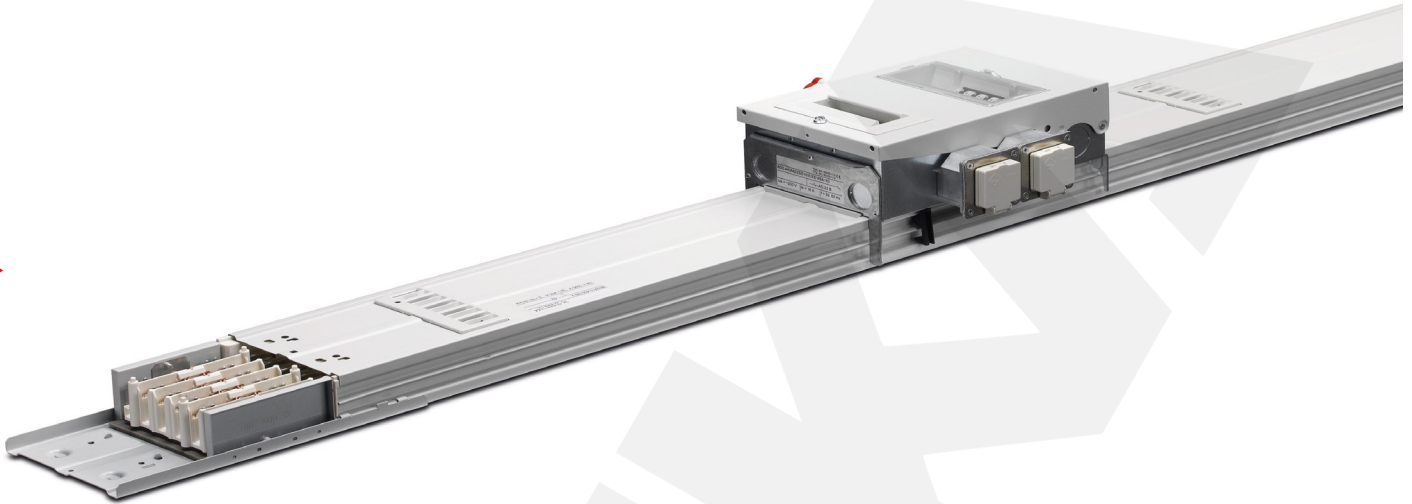

TECHNICAL DATA

Current Ratings (A) :

Copper conductor series from 25A up to 40A

Number of Conductors: 2, 3, 4 or 5

Structure:

- Different conductor configurations up to (5+5) double-side 10 conductors in a single body
- Double-sided 8 outlet windows (4+4) on 1 length Bus-bar of standard 3 meters length
- Flame resistant halogen-free full-length insulation on tin-plated copper conductors
- Easy-to-mount attachment structure with silver-plated spring contacts
- Outlet plugs with lock-mechanism in different colours to indicate phases
- Clean Earth option
- RAL 7038 electrostatic oven-dried painted on galvanized sheet steel body structure can produce upon request.

Product Standard: IP55 Protection Class

APPLICATION

- Offices
- Business Centres
- Banks
- Schools
- Conference Halls

