


WIRE MESH CABLE TRAYS

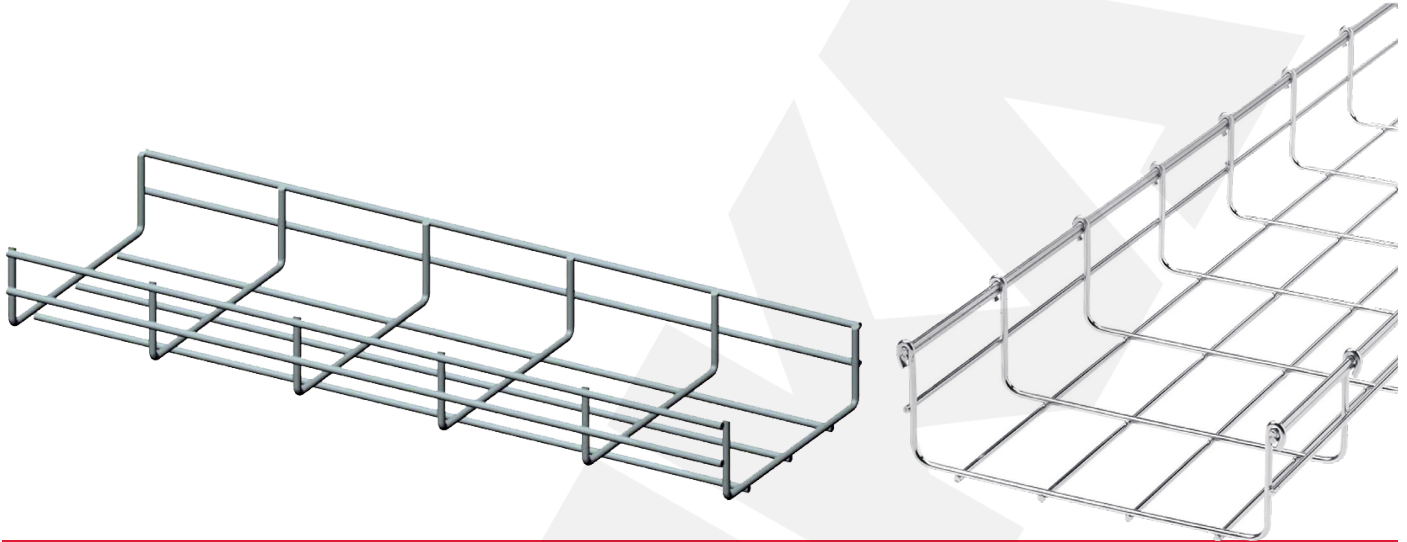

TECHNICAL DATA

Width: From 50mm up to 600mm
Height: Up to 100mm
Length: Up to 3m
Thickness: From 1.0mm up to 4.0mm
* Special dimension can be produced upon the customer's requests.

CABLE LADDER MATERIALS

- Steel
- Stainless Steel
- Aluminium

CABLE LADDER FINISHING

- Hot-dipped Galvanized Cable Trays
- Pre-Galvanized Cable Trays
- Electro-Static Powder Coating

INTRODUCTION

Wire mesh cable trays are made by compounding wire cable conduits with horizontal wires running vertically every 100 mm and vertical wires running horizontally every 50 mm. Low-voltage current cable trays must be installed within a distinct partition within the "wire mesh cable trays." For example, a divider inside wire mesh cable trays must have the same height and length, or low-voltage current installation cables must be in separate cable trays. A plastic cable tie must be used to secure the cables within the cable tray.

ACCESSORIES

- Connector
- Horizontal Bends 45°
- Horizontal Bends 90°
- Reducer
- Tee Bend
- Crossover
- Internal Riser
- External Riser
- End Cap

