


CANOPY LIGHTINGS

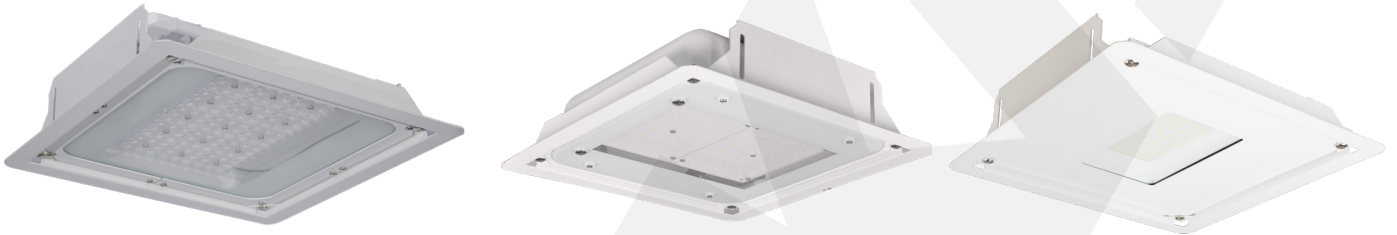

TECHNICAL DATA


Luminaire Body: Poly Carbonate, Aluminium, Aluminium Injection(with/without Electrostatic Powder)
Luminaire Diffuser: PMMA, Clear Glass, Opal Diffuser
Led Type: High-power LED
Power(W): From 8W up to 150W
Mains Voltage(V): From 220-240V
Colour Temperature(K): 3000-6500K
Working Temperature(°C): From -20°C up to +50°C
IP Protection: IP20 - IP40 - IP60
Body Colour: Ral 9003
* Other colours can be produced upon the customer's requests.

INTRODUCTION

Canopy fixtures are fringe lightings that are erected at the industrial sites, and petrol stations to protect them from elements like rain and snow. When compared to traditional canopy products, LED canopy luminaires are easier to maintain, use less energy, and deliver consistent performance. For LED canopy luminaires, the width of the facade and the height of the area should be taken into account, and the lumen package and light distribution characteristic of the luminaire should be chosen based on these factors. Precipitation and other weather events are not a problem with LED canopy luminaires.

APPLICATION

- Streets
- Residential Areas
- Squares
- Parks





Recessed Mounted Petrol Canopy Luminaire



Recessed Mounted Petrol Canopy Luminaire



Recessed Mounted Petrol Canopy Luminaire




Recessed Mounted Canopy Luminaire



Surface Mounted Canopy Luminaire



Surface Mounted Canopy Luminaire

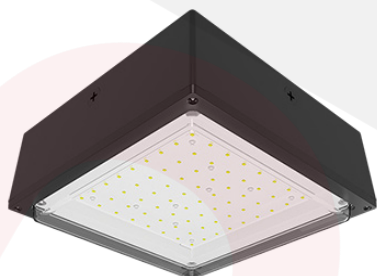

Surface Mounted Canopy Luminaire



Surface Mounted Canopy Luminaire



Recessed Mounted LED Canopy Luminaire



Recessed Mounted LED Canopy Luminaire



Recessed Mounted LED Canopy Luminaire



Recessed Mounted LED Canopy Luminaire