


HIGHBAY LUMINAIRE

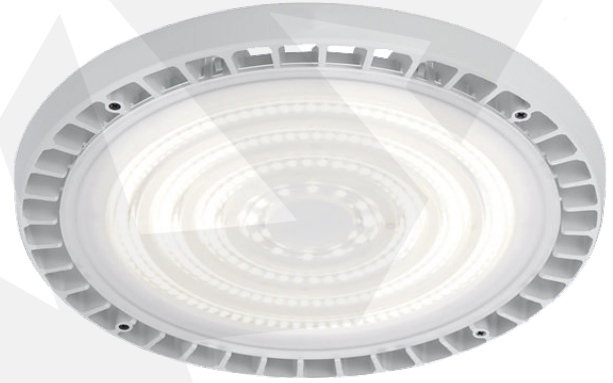

TECHNICAL DATA

Luminaire Body: Aluminium Injection, Electrostatic Powder Coated Metal, Anodized Aluminium Frame, GRP

Luminaire Optic: Micro prismatic Opal, Tempered Glass

Led Type: Mid Power LED

Power(W): From 80W up to 240W

Mains Voltage(V): From 220-240V

Colour Temperature(K): 5000K-6500K

IP Protection: IP20 - IP40 - IP60

Working Temperature(°C): From -20°C up to +50°C

Body Colour: Ral 9003

* Other colours can be produced upon the customer's requests.

* DALI and SwitchDIM options can be produced upon the customer's requests.

INTRODUCTION

A high bay light is one that is designed to be installed in a ceiling that is 20-40 feet (6-12m) above the ground level. In industrial and commercial spaces, a high bay ceiling is common.

APPLICATION

- Residential Areas
- Offices
- Conference Rooms
- Shopping Malls
- Parking Areas





Highbay Luminaire



Highbay Luminaire



Lowbay Luminaire



Lowbay Luminaire



LED Highbay Luminaire



LED Highbay Luminaire



IP44 Highbay Luminaire



IP44 Highbay Luminaire



IP20 Highbay Luminaire



IP20 Highbay Luminaire



Square Highbay Luminaire



Square Highbay Luminaire



Rounded Highbay Luminaire



Rounded Highbay Luminaire